
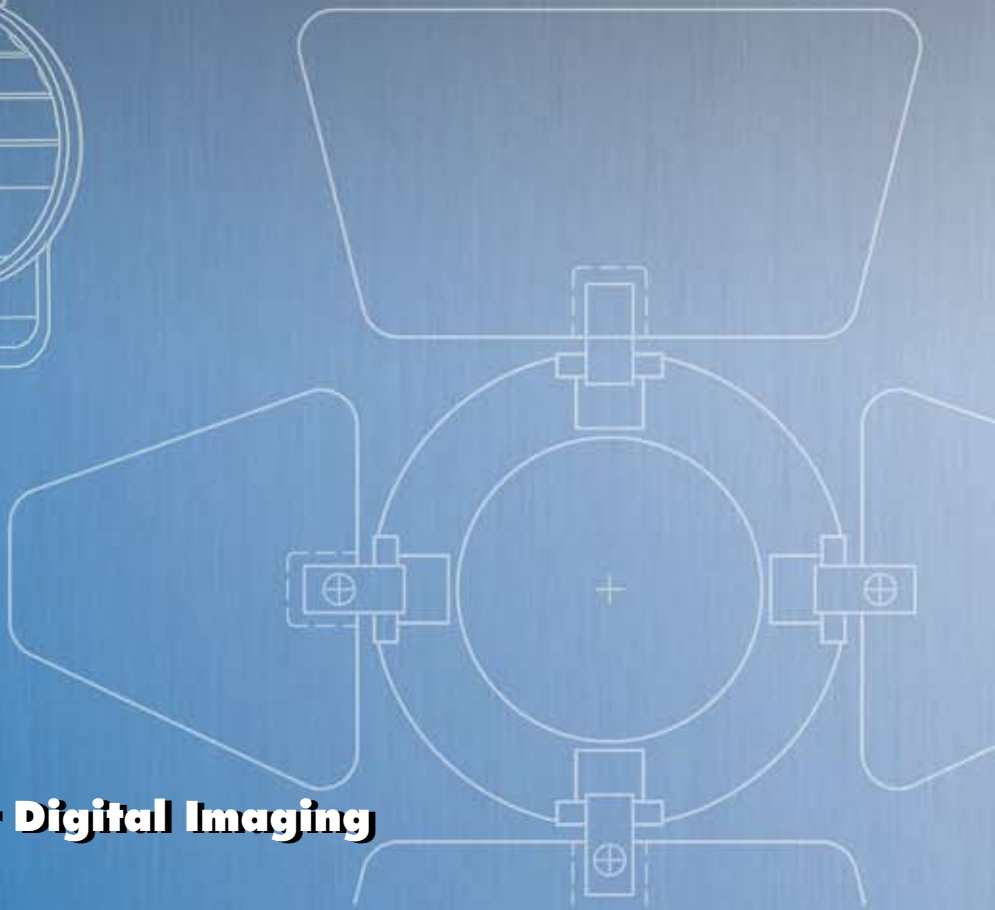


COOL-LUX

PRO TOOLS FOR THE TRADE™

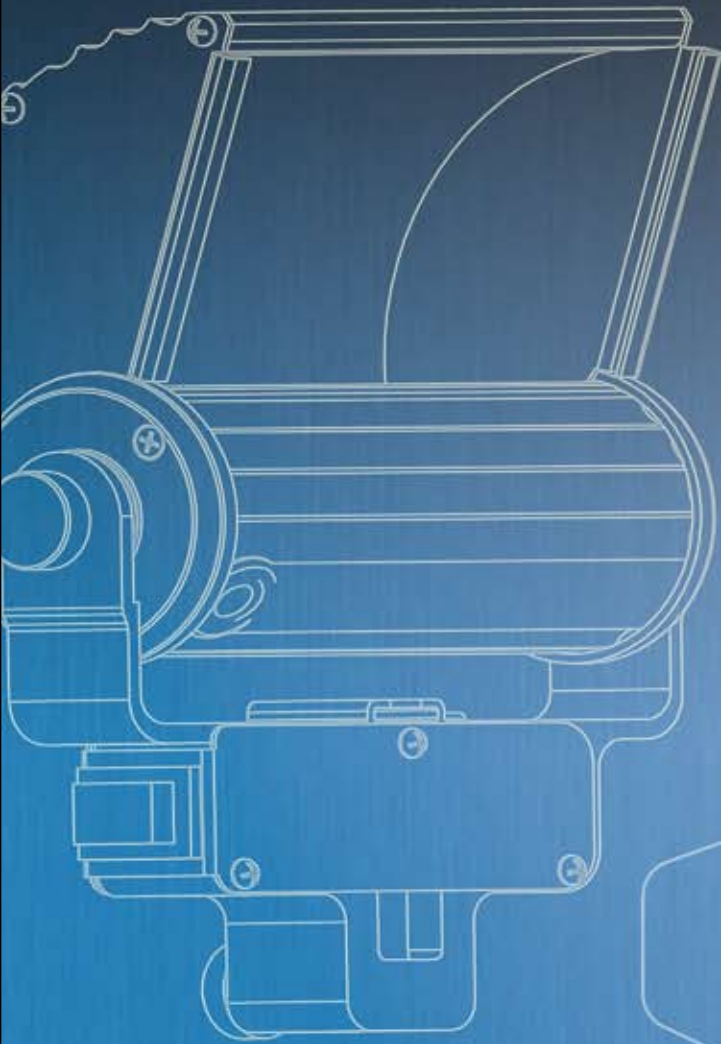

Pro Lighting Products for Digital Imaging

SD | HD | HD DSLR



www.COOL-LUX.com

COOL-LUX

PRO TOOLS FOR THE TRADE™

WHO WE ARE

Since 1977, Cool-Lux has been an innovator and leader in the development of video and film lighting products. We have consistently developed new tools to address lighting issues and embrace new technologies. This is exemplified by the Mini-Cool, which was nominated for a Technical OSCAR, and NASA's choice to be the first video light in space.

Today, HD presents a new lighting challenge. Along with a redesigned format, HD also has greater sensitivity and an expanded tonal range. It is capable of producing more middle tones and improved shadow detail. Consequently, lighting products and techniques have had to change to meet these requirements. Cool-Lux has met this challenge by designing lights and light modifiers that can put the right amount of light where you need it. In the past, using harsh and unflattering light was standard procedure. Now you can use softer more subtle lighting techniques to maximize tonal values, control contrast and add realism. With Cool-Lux you can creatively complement existing light without overpowering it.

With the advent of High Definition DSLRs (HD DSLRs), still photographers now have the ability to capture high definition motion-video using a digital SLR. This exciting new technology opens up a whole new world of opportunities for photographers and videographers alike. Cool-Lux on-camera lights are the ideal solution for the HD DSLR Revolution!

Whether you're shooting SD, HD or HD DSLR, and whether your video lighting requirements are in the studio, on location, on or off camera, Cool-Lux has the right equipment to fit the job.

Please contact us if you have questions or need more information.

Email: Sales@Cool-Lux.com

Phone: (800) 223-2589 • Fax: (630) 830-2525

TABLE OF CONTENTS

Mini-Cool	4
Mini-Cool Kits	5-8
Mini-Cool Accessories	9
Micro-Lux	10
Micro-Lux Kits	11
Digi-Lux	12
Digi-Lux Kits	13
Digi-Lux Accessories	14
SL3000	15
SL3000 Kits & Accessories	16-17
Hollywood Lights	18
Hollywood Combo Light Kits	19-21
Hollywood Broad Light Softbox Kits	22
U3 Tri-Light	23
General Accessories	24-26
Lamp Chart	27
Lead Calcium Battery Packs & Chargers	28-29
Nickel-Cadmium Battery Packs & Chargers	30-31



MINI-COOL

THE FIRST LIGHT DESIGNED EXCLUSIVELY FOR VIDEO

Innovative compact design and light quality led the Mini-Cool to be nominated for a Technical Oscar. It's size, efficiency and unique air-draft ventilation system made it NASA's choice to be the first video light in space.

More importantly, Mini-Cool has earned the trust of videographers as their light of choice, because of its power, small size and wide variety of practical accessories. It is ideal for today's HD & HD DSLR rigs. It is the go anywhere, mount anywhere light. Use Mini-Cool on-camera for everything from location interviews to small group sessions. Mount it off camera, on ceiling grids or clamp it just about anywhere. Put it on a light stand and bounce it out of an umbrella for beautiful soft lighting effects.

When you need power, Mini-Cool delivers!
150 watt max AC, 100 watt max DC.

Mini-Cool accessories include rotating barn doors, daylight and fluorescent Quick-Flip filters, diffusion lenses, AC and DC dimmers, gel packs, bounce umbrellas, a soft box and several mounting devices.

STANDARD AC KIT

LK2000/943117 - Mini-Cool light complete with 150 watt AC lamp.
See page 5 for details.

STANDARD 220V KIT

LK2220/943257 - Mini-Cool light complete with 75 watt 220V lamp.



SPECIFICATIONS

Dimensions	4 3/4" x 2 1/2" x 2 3/4" not including mounting bracket
Dimmer	Optional in-line dimmer available (DC5000)
Weight	12.8 oz.
Voltage	AC/DC 12, 13.2, 14.4, 120-volts
Wattage	150 watts max AC; 100 watts max DC
Lamps	MR16
Sockets	Two pin GZ4
Mount	MD5000 Camera shoe adapter, MD5050 Stand adapter
Cable	10 foot AC cable, 4 foot DC cable
Housing	High impact aircraft aluminum, anodized
Paint	High Temp. 800 degrees F.



MINI-COOL KITS

STANDARD AC KIT LK2000/943117

INCLUDES:

- 1 Mini-Cool
- 1 CC8230 Mini-Cool AC power cord
- 1 FOS-011 150 watt AC Lamp, 120-volt
- 1 MD5000 Camera adapter
- 1 MD5050 Stand adapter



STANDARD AC/DC KIT LK2054/943320

INCLUDES:

- 1 Mini-Cool
- 1 CC8230 Mini-Cool AC power cord
- 1 CC8231 4-pin XLR DC power cord
- 1 FOS-011 150 watt AC Lamp, 120-volt
- 1 FOS-009 75 watt DC Lamp, 12-volt
- 1 MD5000 Camera adapter
- 1 MD5050 Stand adapter





ACCESSORIZED AC/ DC LK2052/943304

- INCLUDES:**
- 1 Mini-Cool
 - 1 CC8230 Mini-Cool AC power cord
 - 1 CC8231 4-pin XLR DC power cord
 - 1 FOS-011 150 watt AC Lamp, 120-volt
 - 1 FOS-009 75 watt DC Lamp, 12-volt
 - 1 MD5000 Camera adapter
 - 1 MD5050 Stand adapter
 - 1 MD5250 Spring clamp 2"
 - 1 LC7101 Mini-Cool barn doors
 - 1 LC7150 AC dimmer, 600 watt
 - 1 LC7171 Mini-Cool soft box with holder

AC ACCENT LIGHT KIT LK2225/943562

- INCLUDES:**
- 1 Mini-Cool
 - 1 CC8230 Mini-Cool AC power cord
 - 1 FOS-011 150 watt AC Lamp, 120-volt
 - 1 MD5000 Camera adapter
 - 1 MD5050 Stand adapter
 - 1 LC7101 Mini-Cool barn doors
 - 1 LC7150 AC dimmer, 600 watt
 - 1 MD5500 8-foot aluminum light stand



AC SOFT ACCENT LIGHT KIT LK2230/943505

- INCLUDES:**
- 1 Mini-Cool
 - 1 CC8230 Mini-Cool AC power cord
 - 1 FOS-011 150 watt AC Lamp, 120-volt
 - 1 MD5000 Camera adapter
 - 1 MD5050 Stand adapter
 - 1 LC7171 Mini-Cool soft box with holder
 - 1 LC7150 AC dimmer, 600 watt
 - 1 MD5500 8-foot aluminum light stand



PRO KIT I AC/ DC LK2064/943478

- INCLUDES:**
- 1 Mini-Cool
 - 1 CC8230 Mini-Cool AC power cord
 - 1 CC8231 4-pin XLR DC power cord
 - 1 FOS-011 150 watt AC Lamp, 120-volt
 - 1 FOS-009 75 watt DC Lamp, 12-volt
 - 1 MD5000 Camera adapter
 - 1 MD5050 Stand adapter
 - 1 BC3054 LCE battery pack w/ XLR, 12-volt
 - 1 BC3354 XLR battery charger

LK2056/943477 - Kit w/ BC4014 battery pack
LK2057/943479 - Kit w/ BC4112 battery pack

AC/DC VIDEO TRAVEL KIT LK2255/943623

- INCLUDES:**
- 2 Mini-Cool
 - 2 CC8230 Mini-Cool AC power cord
 - 2 FOS-011 150 watt AC Lamp, 120-volt
 - 2 MD5000 Camera adapter
 - 2 MD5050 Stand adapter
 - 1 LC7101 Mini-Cool barn doors
 - 1 LC7171 Mini-Cool soft box with holder
 - 2 MD5250 Spring clamp 2"
 - 2 MD5500 8-foot aluminum light stand
 - 1 Digi-Lux
 - 1 CC8234 4-pin XLR DC power cord
 - 1 FTF 35 watt DC lamp, 12-volt
 - 1 MD5000 Camera adapter
 - 1 BC3054 LCE battery pack w/ XLR, 12-volt
 - 1 BC3354 XLR battery charger
 - 1 RP0025 Heavy-duty case



PRO KIT II AC/ DC LK2065/943380

- INCLUDES:**
- 1 Mini-Cool
 - 1 CC8230 Mini-Cool AC power cord
 - 1 CC8231 4-pin XLR DC power cord
 - 1 FOS-011 150 watt AC Lamp, 120-volt
 - 1 FOS-009 75 watt DC Lamp, 12-volt
 - 1 MD5000 Camera adapter
 - 1 MD5050 Stand adapter
 - 1 NC1284 NiCd battery w/ XLR, 12-volt
 - 1 NC3912 NiCd XLR battery charger

MINI-COOL KITS

AC LOCATION LIGHTING KIT LK2240/943565

INCLUDES:

- 2 Mini-Cool
- 2 CC8230 Mini-Cool AC power cord
- 2 FOS-011 150 watt AC Lamp, 120-volt
- 2 MD5000 Camera adapter
- 2 MD5050 Stand adapter
- 2 LC7150 AC dimmer, 600 watt
- 1 LC7171 Mini-Cool soft box with holder
- 1 EC32BC 32" Umbrella
- 1 MD5300 Umbrella mount
- 2 MD5500 8-foot aluminum light stand
- 1 RP0025 Heavy-duty case




AC STUDIO KIT LK2245/943594

INCLUDES:

- 4 Mini-Cool
- 4 CC8230 Mini-Cool AC power cord
- 4 FOS-011 150 watt AC Lamp, 120-volt
- 4 MD5000 Camera adapter
- 4 MD5050 Stand adapter
- 1 MD5250 Spring clamp 2"
- 1 LC7101 Mini-Cool barn doors
- 2 LC7150 AC dimmer, 600 watt
- 1 LC7171 Mini-Cool soft box with holder
- 2 EC32BC 32" Umbrella
- 2 MD5300 Umbrella mount
- 4 MD5500 8-foot aluminum light stand
- 1 RP0025 Heavy-duty case



MINI-COOL ACCESSORIES

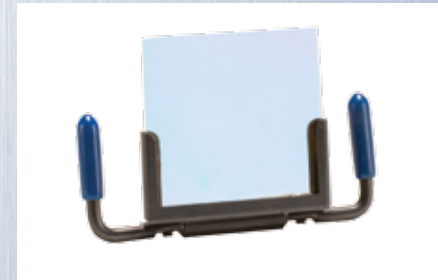

QUICK FLIP ASSEMBLIES FLUORESCENT BALANCE LC7010/942827

A flip of the finger color-corrects your Mini-Cool to 4300K. This convenient filter holder mounts to the bottom panel of the powerful Mini-Cool light.

DAYLIGHT BALANCE LC7011/942856

Color-correct your Mini-Cool to 5600K with a flip of your finger. Tungsten to daylight without stopping the action.

FLUORESCENT FILTER LC7000/942769 (w/o frame)

DAYLIGHT FILTER LC7001/942798 (w/o frame)



AC DIMMER LC7150/942972

Dimming is the fastest and easiest way to control light output or to balance multiple light setups. The LC7150 features a slider for smooth, precise adjustments. It's compact, fast, and helps prolong lamp life.

2-prong. Rated up to 600 watts.




DIFFUSION LENS LC7051/942914

Convert the direct light of your Mini-Cool into a gentle, even light. This lens will increase the beam angle by 20%, and reduce light intensity by 30% while softening shadows.



ROTATING BARN DOOR LC7101/942943

Barn doors are an essential means of controlling light. This light weight four-panel set rotates to give you full artistic freedom. Each panel adjusts independently to precisely define the area of illumination, or to create shadows. The barn doors attach directly to the front of the Mini-Cool.

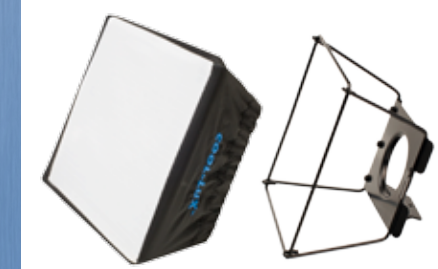

SOFT BOX LC7171/943001

Create a larger, diffused light source with the Mini-Cool soft box. The 5.25" square ripstop nylon soft box produces smooth, elegant skin tones. It carries flat, opens quickly and mounts easily. The beam spread is 130°.



MINI-COOL GEL PACK LC7055/942803

This 8" x 8" gel set comes with four each: half blue gels for daylight balance, salmon gels for skin tones and warming effects, and half white diffusion for general softening.



DC DIMMER DC5000/942363

This 12-15V DC dimmer is rated for 100 watts. Allows total light control from full power to no power and everything in-between. When used above 60% intensity, it will keep the color temperature of your light within $\pm 200K$. It features a knurled dimmer knob that rotates smoothly beneath the finger.

100 watt max DC dimmer.
Full control 100% - 0.
 $\pm 200K$ when used above 60%.

MICRO-LUX

THE SMALLEST ON-CAMERA VIDEO LIGHT IN THE WORLD!

Micro-Lux, is one of the smallest on-camera professional digital video lights available. Only 3 7/8" L X 1 3/4" W X 2 1/8" H, it weighs in at less than 6 ounces making it ideal for today's HD and HD DSLR cameras. The mounting bracket raises the light 2 inches above the camera to lessen the "bomb blast" effect and red eye produced by other on-camera lights. It features a built-in glass diffuser for even light distribution.

This is a rugged light for grab-and-go shooters, and those who need smooth even light quality in a small package.

The Micro-Lux operates on 14.4-volt, 13.2-volt and 12-volt batteries. The maximum lamp rating is 50 watts DC. 4-pin XLR, Brick Tap and cigarette lighter adapters available.

Micro-Lux accessories include the Digi-Tent Matte Box, Digi-Tent Soft Box, Light & Sound Bracket, MaxPower and SmartPower battery belts and more.

Micro-Lux DV KIT

LK2104/943436 - Micro-Lux light complete with 35 watt DC lamp.

See page 11 for details.



- Perfect size for HD DSLR cameras
- Lightweight, durable, compact
- Optional in-line dimmer available (DC5000)
- Built-in diffuser
- Uses MR11 lamps up to 50 watts DC

SPECIFICATIONS

Dimensions	3 7/8" x 1 3/4" x 2 1/8" not including mounting bracket
Dimmer	Optional in-line dimmer available (DC5000)
Weight	5.6 oz.
Voltage	DC 12, 13.2, 14.4-volts
Wattage	50 watts max
Lamps	MR11
Sockets	Two pin GZ4
Mount	MD5000 camera shoe adapter
Cable	4 foot DC cable
Housing	High impact aircraft aluminum, anodized
Paint	High Temp. 800 degrees F.



MICRO-LUX KITS

MICRO-LUX DV KIT LK2104/943436

INCLUDES:

- 1 Micro-Lux
- 1 CC8234 4-pin XLR DC power cord
- 1 FTF 35 watt DC lamp, 12-volt
- 1 MD5000 Camera adapter



CAMPACK DV KIT I LK2504/943639

INCLUDES:

- 1 Micro-Lux
- 1 CC8234 4-pin XLR DC power cord
- 1 FTF 35 watt DC lamp, 12-volt
- 1 MD5000 Camera adapter
- 1 BC3054 LCE battery pack w/ XLR, 12-volt
- 1 BC3354 XLR battery charger

LK2506/943611 - Kit w/ BC4014 battery pack

LK2507/943612 - Kit w/ BC4112 battery pack



CAMPACK DV KIT II LK2580/943615

INCLUDES:

- 1 Micro-Lux
- 1 CC8234 4-pin XLR DC power cord
- 1 FTF 35 watt DC lamp, 12-volt
- 1 MD5000 Camera adapter
- 1 NC1284 NiCd battery w/ XLR, 12-volt
- 1 NC3912 NiCd XLR battery charger



DIGI-LUX

DIMMABLE ON-CAMERA PRO VIDEO LIGHT

Designed to outperform all other on-camera dimmable lighting systems, Digi-Lux features a built-in dimmer regulated by a computerized microprocessor for fast, accurate brightness control. Weighing in at less than 6 ounces, it is the perfect size for today's HD DSLR cameras.

Instantly reduce light output to prevent blown out highlights and harsh shadows. Instantly increase light output from low power levels to eliminate grainy images caused by insufficient light on the subject.

The dimming system holds the color temperature within the range of the camera's automatic exposure system. It is noise free for clean images, and prolongs battery and lamp life.

The adjustable mounting bracket raises the light 2 inches to reduce the possibility of red eye. The frosted lens provides even illumination across the beam spread.

The Digi-Lux operates on 14.4-volt, 13.2-volt and 12-volt batteries. Maximum lamp rating is 35 watts DC. 4-pin XLR, Brick Tap and cigarette lighter adapters available.

Digi-Lux accessories include the Digi-Tent Matte Box, Digi-Tent Soft Box, Light & Sound Bracket, MaxPower and SmartPower battery belts and more.

DC STANDARD KIT

LK2511/943668 - Digi-Lux light complete with 35 watt DC lamp.
See page 13 for details.



- Instantly dims from full power to off
- Perfect size for HD DSLR cameras
- Compact, durable, lightweight
- Uses MR11 lamps up to 35 watts DC
- Diffusion lens for even illumination

SPECIFICATIONS

Dimensions	3 7/8" x 1 3/4" x 2 1/8" not including mounting bracket
Dimmer	Built-in
Weight	5.6 oz.
Voltage	DC 12, 13.2, 14.4-volts
Wattage	35 watts max
Lamps	MR11
Sockets	Two pin GZ4
Mount	MD5000 Camera shoe adapter
Cable	4 foot DC cable
Housing	High impact aircraft aluminum, anodized
Paint	High Temp. 800 degrees F.



DIGI-LUX KITS

DC STANDARD KIT LK2511/943668

INCLUDES:

- 1 Digi-Lux
- 1 CC8234 4-pin XLR DC power cord
- 1 FTF 35 watt DC lamp, 12-volt
- 1 MD5000 Camera adapter



DIGI-TENT KIT LK2513/944857

INCLUDES:

- 1 Digi-Lux
- 1 CC8234 4-pin XLR DC power cord
- 1 FTF 35 watt DC lamp, 12-volt
- 1 MD5000 Camera adapter
- 1 LC7283 Digi-Tent / Matte Box



POWER KIT I LK2524/944973

INCLUDES:

- 1 Digi-Lux
 - 1 CC8234 4-pin XLR DC power cord
 - 1 FTF 35 watt DC lamp, 12-volt
 - 1 MD5000 Camera adapter
 - 1 BC3054 LCE battery pack w/ XLR, 12-volt
 - 1 BC3354 XLR battery charger
- LK2516/944974** - Kit w/ BC4014 battery pack
LK2517/944975 - Kit w/ BC4112 battery pack



POWER KIT II LK2525/944980

INCLUDES:

- 1 Digi-Lux
- 1 CC8234 4-pin XLR DC power cord
- 1 FTF 35 watt DC lamp, 12-volt
- 1 MD5000 Camera adapter
- 1 NC1284 NiCd battery w/ XLR, 12-volt
- 1 NC3912 NiCd XLR battery charger



DIGI-LUX/MICRO-LUX ACCESSORIES



LIGHT STAND/ CAMERA ADAPTER

A. MD5050/943958

Attach the Mini-Cool, Digi-Lux or Micro-Lux to any mount or stand with a 5/8" post. Top of the adapter affixes to the light bracket and the bottom fits onto the mounting post.

B. MD5000/943871

Attach Mini-Cool, Digi-Lux or Micro-Lux to any accessory shoe.



DIGI-TENT/ MATTE BOX

LC7283/943088

This soft box diffuses the light coming from your Digi-Lux or Micro-Lux. Shadows are softened, reducing the visibility of skin imperfections. Made of nylon over a rigid metal frame.

The Digi-Tent measures 3 3/16" x 2 1/4" on its face, with a 2" depth.



DC DIMMER

DC5000/942363

This 12-15V DC dimmer is rated for 100 watts. Allows total light control from full power to no power and everything in-between. When used above 60% intensity, it will keep the color temperature of your light within ±200K. It features a knurled dimmer knob that rotates smoothly beneath the finger.

100 watts max DC dimmer.
Full control 100% - 0.
±200K when used above 60%.



LCE 7Ah WAIST PACK w/ XLR

BC3054/941116

An economical 12-volt LCE power source.

Power 7Ah
Adapters XLR (Female)
Size 15" - 42" waist / shoulder adjustment
Weight 5.5 lbs.
Run Time 35 minutes (rated at 75 watt)

BC3354 XLR Charger Included.

SL3000

THE IDEAL ON-CAMERA SOFTLIGHT/BROAD LIGHT

Why carry two different on-camera lights when one will do the job? The SL3000 is a versatile combination light that does it all. The powerful broad light allows illumination over a wide area. Attach the hood and the broad light becomes a lightweight, 100 watt, softlight that produces beautiful skin tones while softening wrinkles and blemishes. The hood also helps eliminate squinting.

Softlights have a white interior which will change color over time causing a significant yellow/orange color shift. This discoloration adversely affects skin tones and other colors. The SL3000 features a color neutral metal reflector that is softer than white, and will never turn yellow.

The SL3000 is the ideal travel companion because it eliminates the need to carry umbrellas and bulky soft boxes. Three lights and compact stands will fit in a case only 25 inches wide. The SL3000 weighs 12oz.

The SL3000 is a true all-purpose light. Small, powerful and compact. Perfect for today's HD & HD DSLR cameras. Use the broad light for groups and situations where you need maximum output. Use the soft light hood for interviews and other soft light applications.

The SL3000 comes with a 4-pin XLR power cable. Brick Tap and cigarette lighter adapters available.

SL3000 DC STANDARD PACK

SL3000/944567 - SL3000 softlight/broadlight complete with 100 watt DC lamp. See page 16 for details.

SPECIFICATIONS

Dimensions	With hood 6 1/2" x 4 1/2" Without hood 4 1/2" x 4 1/2"
Dimmer	Optional in-line dimmer available (DC5000)
Weight	Without hood 9 oz.; with hood 12 oz.
Angle of Coverage	Softlight: 90 degrees Broad Light: 130 degrees
Voltage	AC/DC 12, 13.2, 14.4, 120, 240-volts
Wattage	100 watts max
Lamps	78 mm, linear quartz halogen, double ended
Sockets	Two pin GZ4
Mount	5/8" male standard, or MD5002 camera shoe adapter
Cable	10 foot AC cable, 4 foot DC cable
Housing	High impact aircraft aluminum, anodized
Paint	High Temp. 800 degrees F.



optional MD3000 bracket



BROAD LIGHT

- Compact, low profile
- Rugged and dependable
- Even illumination
- Ideal for groups & interviews
- Push button on / off
- 16:9 HD wide angle format

SL3000 KITS & ACCESSORIES

DC STANDARD PACK

SL3000/944567

INCLUDES:

- 1 SoftLight/Broad Light
- 1 CC8234 4-pin XLR DC power cord
- 1 MD5002 Camera shoe adapter 5/8" post
- 1 SL100DC 100 watt DC lamp, 13.5-volt




AC/DC PACK

SL3010/944625

INCLUDES:

- 1 SoftLight/Broad Light
- 1 CC8234 4-pin XLR DC power cord
- 1 SL8229 AC power cord
- 1 MD5002 Camera shoe adapter 5/8" post
- 1 SL100DC 100 watt DC lamp, 13.5-volt
- 1 SL100AC 100 watt AC lamp, 120-volt
- 1 LC7150 AC dimmer, 600 watt

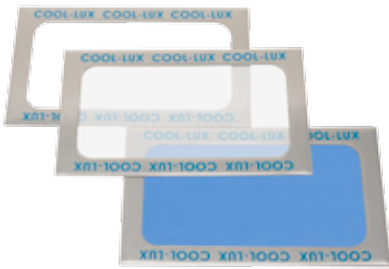

COMBO GEL PACK

SL3600/944656

Set comes with one each: half blue gel for daylight balance, half white diffusion for general softening and shadow reduction, and a mounting frame for your personal favorite.

MOUNTING FRAME

SL3503/944933

(3) mounting frames with adhesive backing.



5/8" SHOE ADAPTER

MD5002/943929

Mount the SL3000 to your camera shoe. Can be used with any light requiring a 5/8" mount post.

5/8" mounting post.
Standard cold shoe adapter w/ adjustment.



DC DIMMER

DC5000/942363

This 12-15V DC dimmer is rated for 100 watts. Allows total light control from full power to no power and everything in-between. When used above 60% intensity, it will keep the color temperature of your light within $\pm 200K$. It features a knurled dimmer knob that rotates smoothly beneath the finger.

100 watt max DC dimmer.
Full control 100% - 0.
 $\pm 200K$ when used above 60%.

LIGHT AND SOUND KIT

SL3000LS/944565

INCLUDES:

- 1 SoftLight/Broad Light
- 1 CC8234 4-pin XLR DC power cord
- 1 SL100DC 100-watt DC lamp, 13.5-volt
- 1 MD5002 Camera shoe adapter 5/8" post
- 1 MD3000 Light and Sound Bracket
- 1 SL3600 Combo Gel Pack
- 1 BC3054 LCE battery pack w/ XLR, 12-volt
- 1 BC3354 XLR battery charger

SL3006LS/944569 - Kit w/ BC4014 battery pack

SL3007LS/944570 - Kit w/ BC4112 battery pack



POWER KIT I

SL3094/945130

INCLUDES:

- 1 SoftLight/Broad Light
- 1 CC8234 4-pin XLR DC power cord
- 1 SL100DC 100 watt DC lamp, 13.5-volt
- 1 MD5002 Camera shoe adapter 5/8" post
- 1 BC3054 LCE battery pack w/ XLR, 12-volt
- 1 BC3354 XLR battery charger

SL3096/945131 - Kit w/ BC4014 battery pack

SL3097/945132 - Kit w/ BC4112 battery pack



POWER KIT II

SL3084/945123

INCLUDES:

- 1 SoftLight/Broad Light
- 1 CC8234 4-pin XLR DC power cord
- 1 SL100DC 100 watt DC lamp, 13.5-volt
- 1 MD5002 Camera shoe adapter 5/8" post
- 1 NC1384 NiCd battery w/ XLR, 13.2-volt
- 1 NC3913 NiCd XLR battery charger



HOLLYWOOD LIGHTS

A VERSATILE COMBINATION LIGHT IN THE STUDIO OR ON LOCATION

The Hollywood two-in-one combination light is a do all, go anywhere light! The Hollywood Combo Light has a removable hood to make it a broad light or softlight. The unit even has an available softbox for ultimate versatility and portability. Perfect for today's HD Video productions.

The Combo Light uses a color-neutral, metal bounce reflector to provide soft illumination for interviews and close-ups. It provides a flattering light that produces excellent skin tones, and diminishes wrinkles and blemishes. No more washed out highlights! The Hollywood Combo Light gives you highlights with detail and shadows with soft edges for greater depth and modeling of facial features.

The light source features an adjustable lamp socket that can use both long and short linear lamps. The mounting bracket attaches directly to a light stand and allows the light to be rotated and tilted for maximum lighting accuracy.



HOLLYWOOD COMBO LIGHT
LK4401/943755 - with 500 watt lamp and hood.



COMBO LIGHT HOOD
LC4001/944406 - Hood for Broad Light.

HOLLYWOOD BROAD LIGHT
LK4010/945571 - with 500 watt lamp (no hood).

SPECIFICATIONS

Material	Formed and stamped steel
Finish	Black and silver high temperature paint, 800 degrees F.
Dimensions	Combo Light - 14" x 9" x 6" Broad Light - 4" x 9" x 6"
Weight	Combo Light - 4 lbs., Broad Light - 2 lbs.
Voltage	100, 120, 220, 240-volts
Wattage	300 to 1000 watts
Lamp Protection	Glass shield
Socket	Linear quartz halogen, double ended
Mount	MD5060 Stand adapter
Cable	15 foot AC cable

HOLLYWOOD KITS & ACCESSORIES




COMBO LIGHT
A. LK4401/943755

- INCLUDES:**
- 1 LK4010 Hollywood Broad Light
 - 1 LC4001 Combo Light Hood
 - 1 LC7080 Safety glass w/ clips
 - 1 MD3100 Safety cable
 - 1 CC8400 Combo Light AC Cord
 - 1 CX-FDF 500 watt clear AC lamp, 120-volt
 - 1 MD5060 Combo Light stand adapter

BROAD LIGHT
B. LK4010/945571

- INCLUDES:**
Same as above without LC4001 Combo Light Hood.

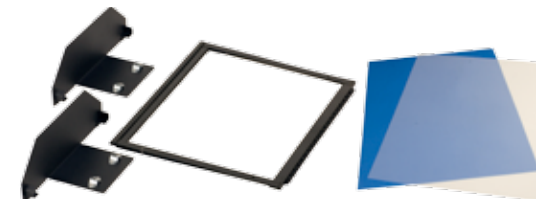


BROAD LIGHT FILTER KIT
LC7065/942850 - Add filters to the LK4010 Broad Light.

REPLACEMENT FILTER SET
LC7007/942854 - (2) 1/2 Blue (2) Diffuser filters. (11 1/2" x 9 1/2").



HOLLYWOOD KIT I
LK2325/945264

- INCLUDES:**
- 1 LK4401 Combo Light
 - 1 LC7080 Safety glass w/ clips
 - 1 MD3100 Safety cable
 - 1 CC8400 Combo Light AC cord
 - 1 CX-FDF 500 watt clear AC lamp, 120-volt
 - 1 CC8280 AC ground plug
 - 1 LC7150 AC dimmer, 600 watt
 - 1 MD5060 Combo Light stand adapter
 - 1 MD5550 8-foot heavy-duty aluminum light stand
 - 1 RP6102 Heavy-duty soft case w/ dividers

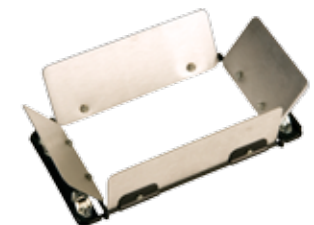

BROAD LIGHT BARNDORS
LC4002/943711

Control the angle of light with these aluminum 4 sided barndoors. Position the broad light where you need it.

HOLLYWOOD COMBO LIGHT KITS



STARTER KIT LK2330/945162

INCLUDES:

- 2 LK4401 Combo Light
- 2 LC7080 Safety glass w/ clips
- 2 MD3100 Safety cable
- 2 CC8400 Combo Light AC cord
- 2 CX-FDF 500 watt clear AC lamp, 120-volt
- 1 CC8280 AC ground plug
- 1 LC7150 AC dimmer, 600 watt
- 2 MD5060 Combo Light stand adapter
- 2 MD5550 8-foot heavy-duty aluminum light stand
- 1 Mini-Cool
- 1 CC8230 Mini-Cool AC power cord
- 1 FOS-011 150 watt AC Lamp, 120-volt
- 1 MD5050 Stand adapter
- 1 MD5500 Light-duty aluminum light stand
- 1 LC7101 Mini-Cool barn doors
- 1 RP0030 Heavy-duty case

STARTER KIT - without case (see above) LK2334/945142

CHAMELEON™ BLUE /GREEN SCREEN CH57/943147

57" x 77" reversible blue/green non-reflective panels. Spring steel frame and bag.



STUDIO INTERVIEW KIT LK2335/945266

INCLUDES:

- 2 LK4401 Combo Light
- 2 LC7080 Safety glass w/ clips
- 2 MD3100 Safety cable
- 2 CC8400 Combo Light AC cord
- 2 CX-FDF 500 watt clear AC lamp, 120-volt
- 2 CC8280 AC ground plug
- 4 LC7150 AC dimmer, 600 watt
- 2 MD5060 Combo Light stand adapter
- 2 MD5550 8-foot heavy-duty aluminum light stand
- 2 Mini-Cool
- 2 CC8230 Mini-Cool AC power cord
- 2 FOS-011 150 watt AC Lamp, 120-volt
- 2 MD5000 Camera adapter
- 2 MD5050 Stand adapter
- 1 LC7101 Mini-Cool barn doors
- 1 LC7171 Mini-Cool soft box with holder
- 1 MD5250 Spring clamp 2"
- 2 MD5500 Light-duty aluminum light stand
- 1 RP0030 Heavy-duty case

STUDIO INTERVIEW KIT - without case (see above) LK2336/945246

HOLLYWOOD COMBO LIGHT KITS



STUDIO KIT LK2345/945276

INCLUDES:

- 3 LK4401 Combo Light
- 3 LC7080 Safety glass w/ clips
- 3 MD3100 Safety cable
- 3 CC8400 Combo Light AC cord
- 3 CX-FDF 500 watt clear AC lamp, 120-volt
- 3 CC8280 AC ground plug
- 3 LC7150 AC dimmer, 600 watt
- 3 MD5060 Combo Light stand adapter
- 3 MD5550 8-foot heavy-duty aluminum light stand
- 2 Mini-Cool
- 2 CC8230 Mini-Cool AC power cord
- 2 FOS-011 150 watt AC Lamp, 120-volt
- 2 MD5000 Camera adapter
- 2 MD5050 Stand adapter
- 1 MD5250 Spring clamp 2"
- 1 LC7101 Mini-Cool barn doors
- 1 LC7171 Mini-Cool soft box with holder
- 2 MD5500 Light-duty aluminum light stand
- 1 RP0030 Heavy-duty case

STUDIO KIT - without case (see above) LK2346/945256



CHROMA KEY BLUE /GREEN SCREEN KIT LK2350/945180

INCLUDES:

- 2 LK4401 Combo Light
- 2 LC7080 Safety glass w/ clips
- 2 MD3100 Safety cable
- 2 CC8400 Combo Light AC cord
- 2 CX-FDF 500 watt clear AC lamp, 120-volt
- 2 CC8280 AC ground plug
- 2 LC7150 AC dimmer, 600 watt
- 2 MD5060 Combo Light stand adapter
- 2 MD5550 8-foot heavy-duty aluminum light stand
- 1 CH57 Chroma-key folding background
- 1 RP6102 Cool Soft Case with dividers

CHROMA KEY BLUE /GREEN SCREEN KIT II LK2355/945185

INCLUDES: (same as above with extras below.)

- 1 Mini-Cool
- 1 CC8230 Mini-Cool AC power cord
- 1 FOS-011 150 watt AC Lamp, 120-volt
- 1 LC7101 Mini-Cool barn doors
- 1 MD5000 Camera adapter
- 1 MD5050 Stand adapter
- 1 MD5500 Light-duty aluminum light stand



HOLLYWOOD SOFT BOX KITS



SOFT BOX KIT II LK4510/945582

INCLUDES:

- 2 LK4010 Hollywood Broad Light
- 2 LC7080 Safety glass w/ clips
- 2 MD3100 Safety cable
- 2 CC8400 Combo Light AC cord
- 2 CX-FDF 500 watt clear AC lamp, 120-volt
- 2 LC4000 Soft box conversion kit
- 2 MD5060 Combo Light stand adapter
- 2 MD5550 8-foot heavy-duty aluminum light stand
- 1 RP6102 Heavy-duty soft case w/ dividers



SOFT BOX KIT III LK4520/945031


INCLUDES:

- 3 LK4010 Hollywood Broad Light
- 3 LC7080 Safety glass w/ clips
- 3 MD3100 Safety cable
- 3 CC8400 Combo Light AC cord
- 3 CX-FDF 500 watt clear AC lamp, 120-volt
- 3 LC4000 Soft box conversion kit
- 3 MD5060 Combo Light stand adapter
- 3 MD5550 8-foot heavy-duty aluminum light stand
- 1 RP6102 Heavy-duty soft case w/ dividers

SOFT BOX CONVERSION KIT (36" X 28") LC4000/945608

Convert the LK4010 Broad Light into a great Soft Box. An economical way to provide even, soft light for any project! Great for movies or photography. This versatile box does it all and stores in a convenient case with carry handle.

Includes: Softbox, inner diffusion panel, outer diffusion panel, (4) metal structure rods, Broad Light speed ring and handy carry case.

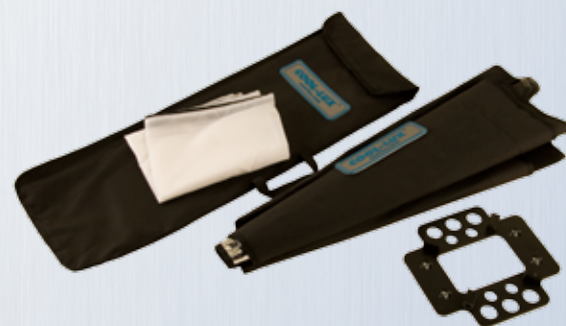

U3 TRI-LIGHT

GO FROM FULL POWER TO 1/3 POWER AND NEVER CHANGE COLOR TEMPERATURE.

The U3 Tri-Light was designed for on-site video production where conditions require the operator to change light output without using dimmers and without altering color temperature. This rugged DC light is built from a solid piece of T-60 aluminum extrusion to withstand heavy use in all kinds of terrain.

The U3 Tri-Light lets you to decrease light output from long shots to mid-range and close-ups with just the flip of a switch. The light comes complete with two 35 watt flood lamps and one 20 watt spot. The combined output for all three lamps is 1500 LUX. Turn off the spot and output drops to 700 LUX. Turn off one of the floods and output is reduced to 350 LUX.

The U3 comes complete with three lamps, rotating gel holder, daylight and diffusion gels and a 4 pin XLR power cord. Each lamp has an individual on/off power switch and green LED to indicate which lamps are on. A master switch turns all three lights on or off simultaneously. You can install any combination of lamps to fit your individual shooting requirements.

Accessories: Filter Kits

U3 TRI-LIGHT

U30010/944741 - U3 light complete with two 35 watt flood and one 20 watt spot DC lamps.



- Change light levels without a dimmer
- No shift in color temperature
- Heavy duty construction
- Perfect for HD & HD DSLR



U3 Filter Kit Options

- KIT I U33002/945350** (6) 1/2 Blue, (4) Full Blue, (10) Diffusion
- KIT II U33003/945379** (10) Full Blue
- KIT III U33004/945437** (10) Half Diffusion

SPECIFICATIONS

Dimensions	3 3/4" x 2 7/8" x 3" not including mounting bracket
Dimmer	Optional in-line dimmer available (DC5000)
Weight	12.5 oz.
Voltage	DC 12, 13.2, 14.4-volts
Wattage	105 watts max. (35 watts per socket)
Lamps	MR11
Sockets	Two pin GZ4
Mount	5/8" standard, or MD5002 camera shoe adapter
Cable	4 foot DC cable
Housing	High impact aircraft aluminum, painted
Paint	High Temp. 800 degrees F.

ACCESSORIES GENERAL PURPOSE

ACCESSORIES GENERAL PURPOSE



STAND ADAPTERS MD5050/943958

Attach the **Mini-Cool, Digi-Lux or Micro-Lux** to any mount or stand with a 5/8" post. 5/8" female stand adapter.

MD5060/943943

Attach the **Hollywood Combo Light** to any mount or stand with a 5/8" post. 5/8" female stand adapter.



SHOE ADAPTERS

A. MD5002/943929

Mount the SL3000 / U3 to a camera shoe. Can be used with any light requiring a 5/8" mounting post.

5/8" mounting post.
Cold shoe adapter w/ adjustment.

B. MD5000/943871

Hook the Mini-Cool / Digi-Lux / Micro-Lux to any accessory shoe.

Cold shoe adapter.



BOUNCE UMBRELLAS

EC32BC/909143 EC45BC/909201 EC60BC/909317

Create soft, nearly shadowless light with Eclipse® umbrellas by Photogenic®. The black cover can be removed from the inner white lining, allowing it to be used as a shoot-through translucent umbrella.

32" / 45" / 60" measured over the dome. Removeable black backing, white interior.



ACCESSORY BRACKET MD3200/945520

Heavy gauge aluminum bracket screws to the camera tripod mount. It has a padded grip and two accessory shoes for a light and microphone. A simple but invaluable accessory.

Two cold accessory shoes.
Mounts into 1/4 x 20 female adapter.



LIGHT & SOUND BRACKET MD3000/943813

Asymmetrical design allows for optimal placement of a light, monitor or microphone. Handy and compact bracket is made from extruded aluminum and mounts to the camera accessory shoe.


Sound shoe height	2"
Light shoe height	3.5"
Weight	1.7 oz.



TWO LIGHT ADAPTER MD4000/943842

This bracket mounts into a 5/8" female mount, allowing you to bounce two Mini-Cools into an umbrella for double the light intensity. Use it anytime you need more light from one position.

Fits MD5300 Umbrella Mount.

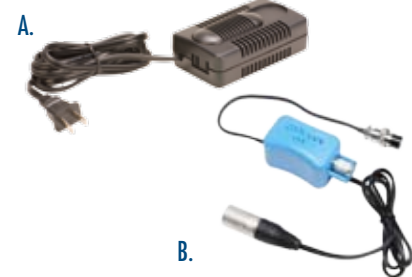

DIMMERS

A. LC7150/942972

600 watt max AC dimmer.
6' foot power cord.
2-prong.

B. DC5000/942363

100 watt max DC dimmer.
Full control 100% - 0.
±200K when used above 60%.



PUTTY KNIFE MOUNT MD5100/943987

The solution to many difficult light mounting problems. Place the blade in cracks, between a door frame, under books or tape to any surface.

5/8" mounting post.



UMBRELLA MOUNT MD5300/944161

Lightweight but sturdy polycarbonate light and umbrella mount with cold shoe adapter.

5/8" - 3/8" female adapter mount.
Umbrella mount.
Cold shoe included.
5/8" stud with 1/4 x 20 thread included.
Friction style adjustment knob.



HARD CASE w/ FOAM RP0025/945213

Double sided hard case with foam. Top interior lid has horizontal separator for stands and longer items. A plastic cover holds them securely in place. The bottom has foam to protect your Mini-Cool and delicate accessories. Heavy duty latches and hinges for years of use!

Exterior length	28 1/4"
Exterior width	15 1/2"
Exterior height	8 1/2"
Interior lid upper	26" x 7" x 3 1/2"
Interior lid lower	26" x 5 1/4" x 3 1/2"
Interior length	27 1/2"
Interior width	13 3/4"
Interior height	3"
Weight	13 lbs.



HOLLYWOOD TRAVEL CASE RP0030/945217

Hard case with dividers for Hollywood Combo Light. The upper lid has foam backing with three bungees to hold stands. The bottom is divided into 8 sections. (3) areas for Combo Lights. (1) for softboxes and longer accessories and (4) areas for cords.

Exterior length	40 3/4"
Exterior width	23 1/4"
Exterior height	9 3/4"
Interior upper	2 1/2" x 39"
Interior length	39"
Interior width	21"
Interior height	8 1/4"
Bottom sections	
(3) 13 1/2" x 12" x 8 1/4"	
(4) 10" x 6" x 3 1/2"	
(1) 30" x 3" x 9"	
Weight	29 lbs.



SOFT CASE w/ DIVIDERS RP6102/945245

This large soft case with dividers has a firm bottom with adjustable dividers for three compartments, and a rigid top shelf. Two zippered external pockets run the length of the case.

Exterior length	37"
Exterior width	10"
Exterior height	7"
Weight	11 lbs.



LIGHT STAND
MD5500/944249

Maximum height 96" (8 feet)
Minimum height 28"
Closed length 26.5"
Weight 2.5 lbs.
Footprint 30"
Top 5/8" mounting post
1/4" x 20 thread



HEAVY DUTY LIGHT STAND
MD5550/944283

Maximum height 96" (8 feet)
Minimum height 32"
Closed length 29"
Weight 4.9 lbs.
Footprint 36"
Top 5/8" mounting post



COOL-CLAMP
MD5052/942001

Adjustable screw clamp locks securely onto tubular or flat surfaces up to 2" thick.
5/8" or 3/8" mounting post with 1/4 x 20 top.



"T" BAR CLAMP
MD5150/944016

Attaches to the aluminum sections on suspended drop ceilings.
5/8" mounting post.



ULTRA CLAMP
MD2051/943738

Rugged screw clamp can be mounted anywhere from a 2" pipe to a car window.
5/8" mounting post.
2" wide threaded throat.



SPRING CLAMP
MD5250/944045

A steel spring clamp mount with non-marring vinyl-coated clamping surfaces.
5/8" mounting post.
2" wide max clamping range.

POWER CORDS

	Mini-Cool	Micro-Lux	Digi-Lux	SL3000	U3	Combo Light
CC8229 941580		x	x	x	x	
CC8239 941870	x					
CC8234 941725		x	x	x	x	
CC8231 941638	x					
SL8229 941575				x		
CC8230 941609	x					
CC8400 945495						x
CC8238 941841		x	x	x	x	
CC8313 942015	x					

ADAPTERS

CC8010 941406	Male cig. to male 4-pin XLR.	CC8012 941416	Female cig. to male 4-pin XLR.	CC8014 941435	Male cig. to female 4-pin XLR.
---------------	------------------------------	---------------	--------------------------------	---------------	--------------------------------

MINI-COOL MR16 AC LAMPS

Type	Part Number	Watts	Volts	Amps	Beam Angle	Color Temp.	Life Hours	Approx. Output fc @ 5' feet
FOS-011	942624	150	120	1.25	Flood 50°	3250K	300	275
FOS-075	942740	75	120	0.75	Flood 40°	3100K	2000	36
FOS-050	942711	50	120	0.4	Flood 40°	3100K	2000	16
FOS-035	942682	35	120	0.3	Flood 40°	3100K	2000	6
FOS-275	942755	75	240	n/a	Flood 40°	3000K	2000	75

MINI-COOL MR16 DC LAMPS

Type	Part Number	Watts	Volts	Amps	Beam Angle	Color Temp.	Life Hours	Approx. Output fc @ 5' feet
FOS-003	942421	100	12	8.33	Flood 40°	3300K	30	135
FOS-004	942450	50	12	4.17	Flood 40°	3200K	2000	120
FOS-005	942479	25	12	2.08	Spot 14°	3200K	2000	186
FOS-006	942508	50	12	4.17	Spot 14°	3200K	2000	384
FOS-008	942566	75	12	6.25	Spot 14°	3200K	2000	430
FOS-009	942595	75	12	6.25	Flood 45°	3200K	2000	130

MICRO-LUX, DIGI-LUX AND U3 MR11 DC LAMPS

Type	Part Number	Watts	Volts	Amps	Beam Angle	Color Temp.	Life Hours	Approx. Output fc @ 5' feet
U3035S	944822	35	12	2.92	Spot 12°	3000K	2000	50
U3035F	944828	35	12	4.17	Flood 30°	3000K	2000	39
U3020S	944799	20	12	1.66	Spot 12°	3000K	2000	75
U3020F	944770	20	12	2.80	Flood 30°	3000K	2000	65
FTF	909873	35	12	2.91	Spot 20°	3000K	2000	50
JCR **	942659	50	12	4.20	Flood 30°	5000K	50	135

** JCR is rated for Micro-Lux only. Caution Hot **

SL3000 HALOGEN AC LAMPS

Type	Part Number	Watts	Volts	Color Temp.	Life Hours	Approx. Output fc @ 5' feet
SL75AC	945321	75	110	2600K	1000	11
SL100AC	944480	100	110	2600K	1000	18

* Lamps tested in unit with safety glass in place.

SL3000 HALOGEN DC LAMPS

Type	Part Number	Watts	Volts	Color Temp.	Life Hours	Approx. Output fc @ 5' feet
SL60DC	944683	56	12	2800K	550	15
		60	13.2	2800K	350	17
		65	14.4	2800K	250	18
SL100DC	944538	92	12	3100K	550	21
		100	13.2	3200K	350	23
		110	14.4	3300K	250	25

* All DC Halogen Lamps are rated for 12, 13.2 and 14.4-volt. Wattage ratings are approximate.

* Lamps tested in unit with safety glass in place.

COMBO LIGHT QUARTZ HALOGEN AC LAMPS

Type	Part Number	Watts	Volts	Finish	CBCP* broad (soft)	Color Temp.	Life Hours	Approx. Output fc @ 5' feet
CX-FDF	942276	500	120	clear	9400 (3475)	3000K	400	153
CX-EMD	942218	750	120	frosted	13670 (5060)	3000K	400	234
CX-EJG	942189	750	120	clear	14170 (5240)	3000K	400	210
CX-FCM	942247	1000	120	clear	19500 (7200)	3000K	400	335

* CBCP - Center Beam Candle Power

* Lamps tested in unit with safety glass in place.



BATTERY PACKS LEAD CALCIUM

Cool-Lux SmartPower Belts and Packs use high-quality, high-reliability Lead-Calcium Electrolyte (LCE) cells that cost much less than NiCd cells, and are much more forgiving. They'll hold up to poor charging habits, deep-discharge operations, and can be stored with minimal maintenance. They're leakproof, recover to a full charge, and they will never suffer from memory loss.

SmartPower Belts and Packs are virtually indestructible, and constructed with rugged, lightweight 1,000-denier nylon. Each is precisely cut and stitched with durable, condensed, heavy-duty thread to assure a smooth, tight surface with the cells firmly encased. Soft, high-density foam padding provides comfort while shooting. The LCE battery belts are adjustable from 39 to 52 inches. The Smaller BC3054 / BC3050 adjusts from 15 to 42 inches. All belts and packs are supplied with a charger.



LCE 7Ah WAIST PACK w/ XLR BC3054/941116

An economical 12-volt LCE power source with XLR Connector. BC3354 charger included.

Power 7Ah
Adapter XLR (Female)
Size 15" - 42" waist / shoulder adjustment
Weight 5.5 lbs.
Run Time 35 minutes (rated at 75 watt)



LCE 7Ah WAIST PACK w/ CIG BC3050/941087

An economical 12-volt LCE power source with cigarette connector. BC3351 charger included.

Power 7Ah
Adapter Cigarette (Female)
Size 15" - 42" waist / shoulder adjustment
Weight 5.5 lbs.
Run Time 35 minutes (rated at 75 Watt)

BATTERY PACKS LEAD CALCIUM



LCE 14Ah SHOULDER PACK BC4014/945154

This portable and affordable 12-volt, 14Ah battery pack has an LED power gauge to monitor voltage. BC3354 charger included.

Power 14Ah
Adapters 4-pin XLR (dual female)
Extras LED power gauge
Size Shoulder adjustment
Weight 11 lbs.
Run Time 65 minutes (rated @ 75 watts)



LCE 12Ah BATTERY BELT BC4112/941210

This portable and easy to wear 12-volt, 12Ah battery belt has an LED power gauge to monitor voltage. BC3354 charger included.

Power 12Ah
Adapters 4-pin XLR (dual female)
Extras LED power gauge
Size 39" - 52" waist adjustment
Weight 9 lbs.
Run Time 90 minutes (rated @ 75 Watts)



LCE 24Ah HD BATTERY BELT BC4224/941220

This premium HD battery belt is rated at 12-volt, 24Ah and has an LED power gauge to monitor voltage. BC3354 charger included.

Power 24Ah
Adapters 4-pin XLR (dual female)
Extras LED power gauge
Size 39" - 52" waist adjustment
Weight 18.5 lbs.
Run Time 165 minutes (rated @ 75 Watts)



SUPERFAST CHARGER BC3504/941377

This 12-volt, 4 amp Superfast Charger is recommended for use only with LCE power gauge pack and belts. The Superfast Charger reduces charging time up to 75%.

(NOT RECOMMENDED FOR BC3050/54).

4Ah regulated with overcharge protection.
12-volt LCE charger.



CHARGERS BC3354/941319

XLR male connector.
1.2Ah non-regulated.
12-volt.

BC3351/941290

Cigarette male connector.
1.2Ah non-regulated.
12-volt.

LCE BATTERY RUN TIMES* WITH 75 WATT LAMP

BC3050/54 (7 amp hr)	35 min. **
BC4014 (14 amp hr)	65 min.
BC4112 (12 amp hr)	90 min.
BC4224 (24 amp hr)	165 min.

*measured to 75% of full wattage
Batteries charged with optional SuperFast charger
** BC3050/54 charged with FastCharger

RECOMMENDED CHARGE TIMES FOR LCE BATTERIES

Battery	With SuperFast Charger*	With Fast Charger**
BC3050/54	not recommended	7 hrs.
BC4014	5 hrs.	14 hrs.
BC4112	4 hrs.	12 hrs.
BC4224	8 hrs.	20 hrs.

*Charging current: 4.0 amps.
**Charging current: 1.2 amps.

BATTERY PACKS NICKEL-CADMIUM

Cool-Lux MaxPower Belts use nickel-cadmium (NiCd) cells that are voltage-matched for every belt. This is called cell balancing. Cell balancing allows all the cells to charge and discharge at the same rate, preventing premature battery failure. It is an expensive, time consuming quality check, but one that is extremely important. It ensures that every cell performs to optimal performance.

The belt itself is virtually indestructible, and constructed with rugged, lightweight 1,000-denier nylon. Each is precisely cut and stitched with durable, condensed, heavy-duty thread to assure a smooth, tight surface with the cells firmly encased.



NiCd BATTERY RUN TIMES* WITH 75 WATT LAMP

NC1284	60 min. @ 12.0v
NC1384	60 min. @ 13.2v
NC1484	60 min. @ 14.4v

*measured to 75% of full wattage

12V MAXPOWER BELT NC1284/941251

This NiCd 12-volt, 7Ah battery belt offers a control box with two 4-pin XLR plugs and an LED power gauge. NC3912 charger included.

Volts	12.0-volt
Power	7Ah
Adapters	4-pin XLR (dual female)
Extras	LED power gauge
Size	35" - 56" waist adjustment
Weight	4.9 lbs.



13V MAXPOWER BELT NC1384/941226

This NiCd 13.2-volt, 7Ah battery belt offers a control box with two 4-pin XLR plugs and an LED power gauge. NC3913 charger included.

Volts	13.2-volt
Power	7Ah
Adapters	4-pin XLR (dual female)
Extras	LED power gauge
Size	35" - 56" waist adjustment
Weight	6.6 lbs.



14V MAXPOWER BELT NC1484/945158

This NiCd 14.4-volt, 7Ah battery belt offers a control box with two 4-pin XLR plugs and an LED power gauge. NC3914 charger included.

Volts	14.4-volt
Power	7Ah
Adapters	4-pin XLR (dual female)
Extras	LED power gauge
Size	35" - 56" waist adjustment
Weight	7.1 lbs.

NICKEL-CADMIUM CHARGERS



NC3912/944393

The NC3912 is a standard 12-volt charger for the NC1284 belt. 1.2Ah non-regulated.

NC3913/944422

The NC3913 is a standard 13.2-volt charger for the NC1384 belt. 1.2Ah non-regulated.

NC3914/944451

The NC3914 is a standard 14.4-volt charger for the NC1484 belt. 1.2Ah non-regulated.



DELTA FORCE CHARGER NC3813-4/944306

This charger can greatly increase the life of any NiCd battery. Tests have proven that it is not unusual to achieve one thousand or more charge cycles when using a four stage Minus Delta V charging method. The same tests have shown older batteries will recover substantially by reducing crystallization and restoring the battery to near normal performance.

The heart of the Delta Force Charger is a micro-controller monitoring the battery's vital signs, voltage current and other variables. When a battery is first connected, the charger will rapidly and efficiently charge the battery to about 70% of its capacity in the first few minutes. The cells will absorb almost all of the energy and stay cool. The charger continues until the battery reaches its characteristic Delta Slope, indicating an absolute full charge. The computer senses the beginning of the slope, terminating the full charge and shifts to a trickle.

SPECIFICATIONS

Input	From 86VAC to 280VAC
Charge rate	4.0 Amp
Dimensions	5.75" x 2.5" x 2.5"
Weight	1 lb.
Housing	ABS Construction



COOL-LUX a division of PromarkBrands
1268 Humbracht Circle • Bartlett, IL USA 60103-1631
T: 800.223.2589 • F: 630.830.2525
www.**COOL-LUX**.com • sales@**COOL-LUX**.com

p/n 999508
04/11 rev 01

